

Electric Curtain Track Systems



Application Chart


Specification	Applications				Profile	Features / Options										Fitting Surfaces	System						
	Weight Range	Single Stack	Pair Stack	Multiple Stack		Asymmetric	Profile Number	Dimensions in mm	Gliding Channel	Special Recess Profile available	Min. Bending Radius (mm)	Wave Glider-Cord	Roller or Gliders	Suitable for Bus Technology	Timer / IR Facility			Light Sensor	Radio Control	Ceiling Fix	Wall Fix	Recess Fix	Wood
kg	●	●			2191		5.4	250	●		●	●				●	●		●	●		5090	
kg	●	●	●		2191		5.4	250	●	●		●	●	●	●	●	●	●	●	●	●	●	5200
kg	●	●	●	●	5141		5.4	500	●	●		●	●	●	●	●	●	●		●	●		5220
kg	●	●	●		2191		5.4	250	●	●	●	●	●	Optional		●	●	●	●	●	●	●	5400
kg	●	●	●	●	5141		5.4	500	●	●	●	●	●	Optional		●	●	●	●	●			5420
kg	●	●	●	●	5301		5.4	500		●		●		Optional		●	●	●	●	●			5300
kg	●	●	●	●	5810		10	500		●						●		Wall or Floor		●	●		5800

Light-weight applications

Medium-weight applications

Heavy-duty applications

Electric track load charts

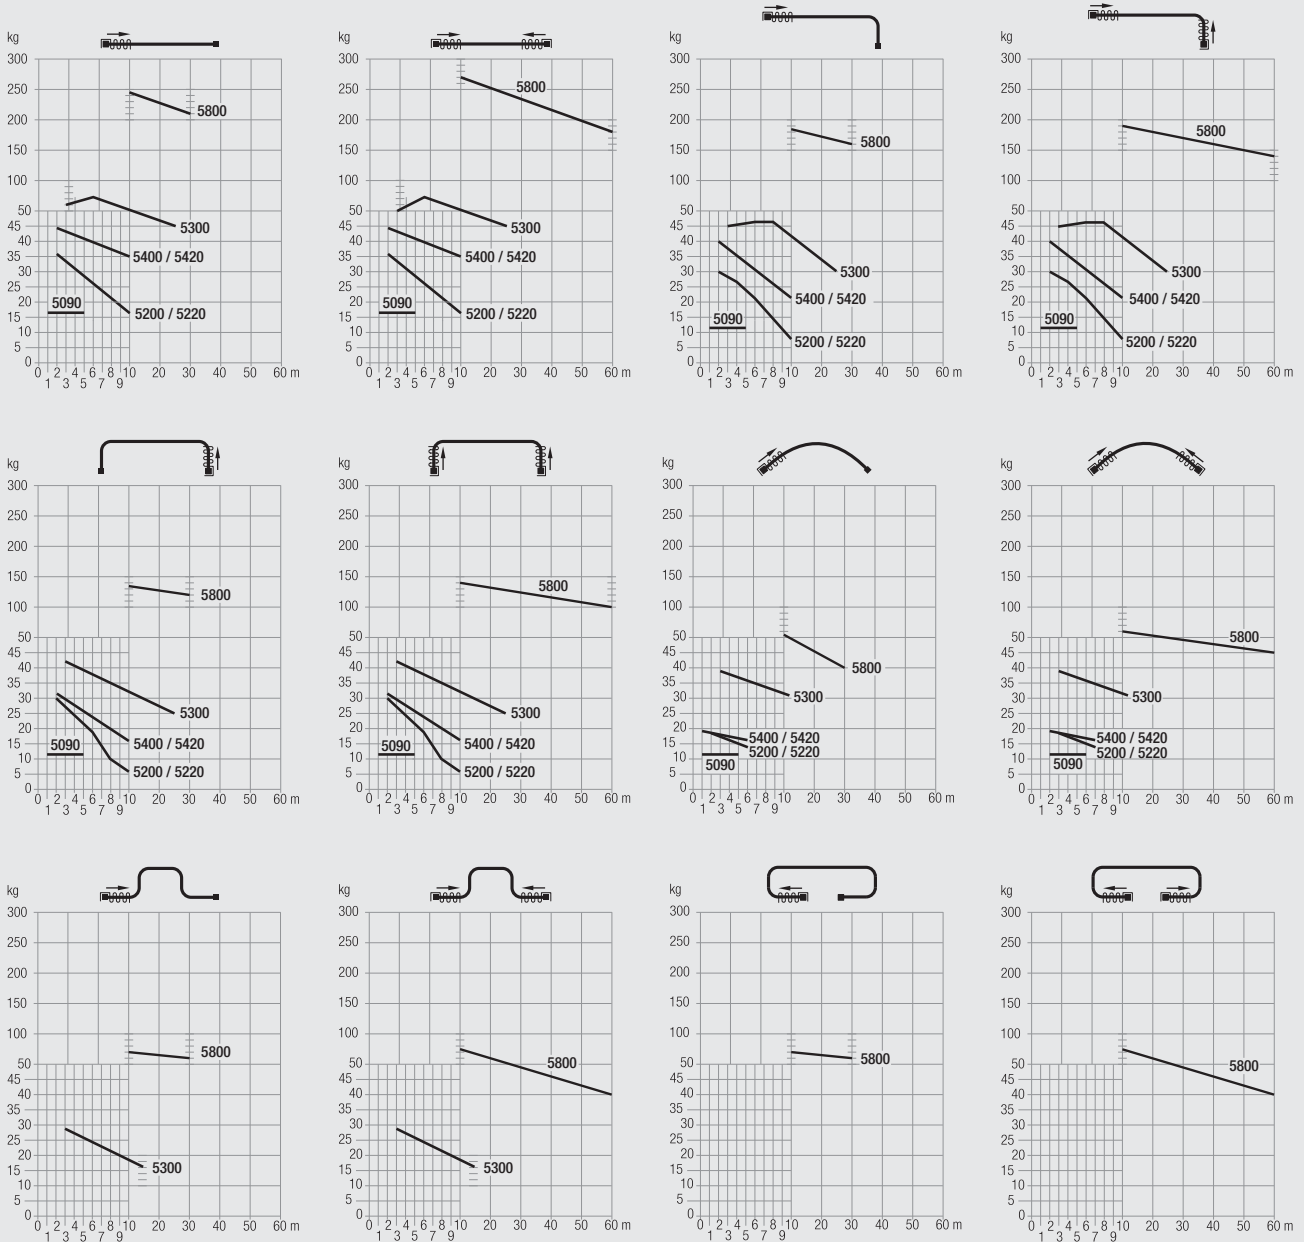

The curtain heading must be completely below the track or the guarantee is invalid.