


Dim-Out Blind System

Silent Gliss® 4590




Product Information

- Crank operation
- Horizontal or sloping applications
- Fabrics are contained within the side profiles by rivets to prevent the fabric coming out
- Black or white profile as standard; silver and colours to special quote. Plastic components are black or white in all cases
- Choice of FR blackout fabrics. System can also be used as a flyscreen
- Delivered ready-assembled made-to-measure
- Delivered in white or black aluminium framework



4590

Profile and Bending Information



How to Measure

Measurements for Silent Gliss Dim-Out Systems should be undertaken by a fully trained dim-out specialist.

System Dimensions



140cm




80cm




180cm

Fitting Basic Information

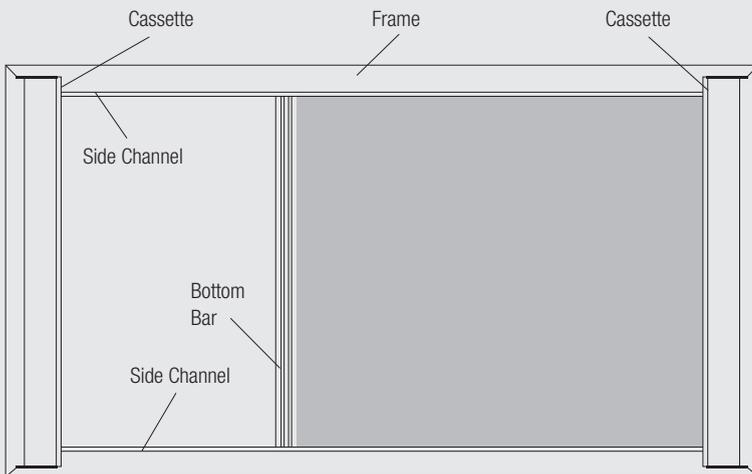

4590

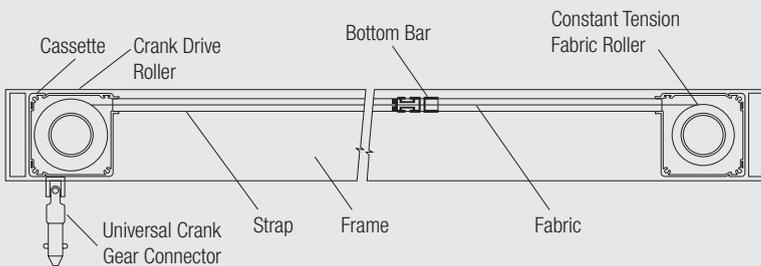

Fitting Options


Fitting directly into structure

Fix the system direct to the structure by drilling through the frame.

Fitting with the use of a batten frame

Build a frame with wooden battens inside the recess of the structure and allow the blind to sit on the frame.

Horizontal or sloping fitting

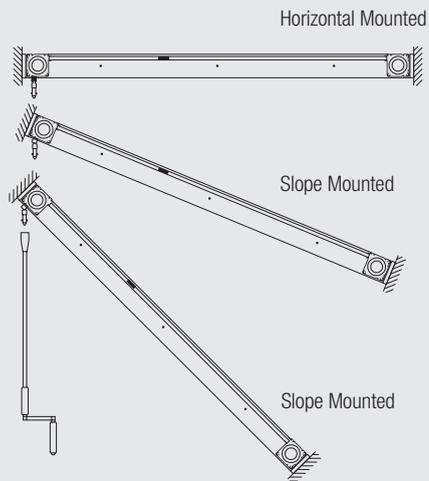

Standard Accessories

0501 L-Bracket



4590