


Chain Operated Roller Blind System

Silent Gliss® 4910

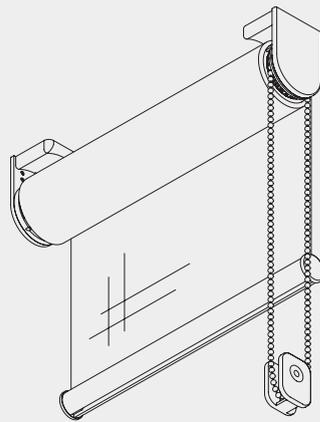

Product Information

- Silent and smooth chain operated roller blind system for residential and contract applications
- Effortless and elegant operation with stainless steel bead chain
- Blind can be stopped at any given position
- Easy ceiling, wall or recess fix
- Optional continuous installation profile in white as standard with easy click in brackets for fast fixing
- Optional adjustable end stop allows upper or lower limit setting after installation
- Side-by-side version with centre support bracket and minimal light gap
- Side guide option available
- Choice of bottom bar designs
- Optional metal design brackets with or without continuous headrail
- Optional stop controller mechanism halts the blind at any given position - ideal for very tall windows or contracts where all blinds must be at the same level from the outside
- Optional integral Child Safety Device




4910

Supplied by

SG-S | Silent Gliss Spares
Silent Gliss Systems

www.sg-s.co.uk email: sales@sg-s.co.uk tel: 01395 232528

Profile and Specification Information

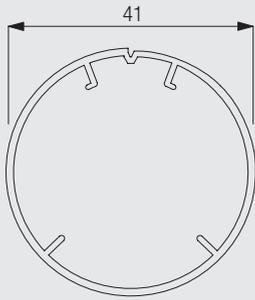


10531

Specification Guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 4910 chain operated roller blind system. Fixed to wall/ceiling/inside recess with 3044 clamp or optional 10539 click bracket and installation profile 10534 and endcovers 10574. Aluminium bottom bar 4221 in white/silver as standard (other shape options available). Optional adjustable endstop allows upper or lower limit setting. Fabric to be selected from Silent Gliss range.

How to Measure

Single system

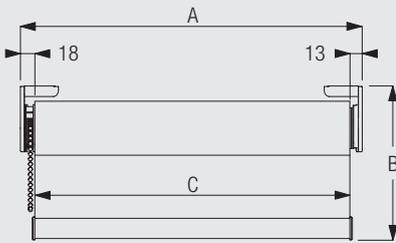

A: system width (inside recess includes bracket covers)
 B: system drop
 C: fabric width


Please note:

- OUTSIDE recess does not include bracket covers, please add 4mm.
- measurements differ when side-guide option is used.



4910

Side-by-side systems (unconnected) - not available with design bracket option

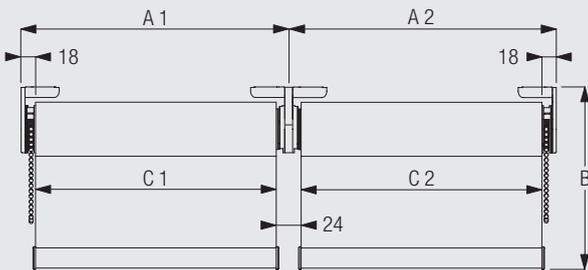

A: system width (inside recess includes bracket covers)
 B: system drop
 C: fabric width

Please note:

- OUTSIDE recess does not include bracket covers, please add 4mm
- measurements differ when side-guide option is used.

System Dimensions



Single System: 2.4m



Single System: 60cm



3 m



7.2m²



3kg

Maximum system width to drop ratio should not exceed 3.5:1

Please note: maximum system width/drop also depends on the fabric type.

Supplied by

SG-S | Silent Gliss Spares
 Silent Gliss Systems

www.sg-s.co.uk email: sales@sg-s.co.uk tel: 01395 232528

Silent Gliss®

Maximum system drop

Wall fitting:

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	300	300	300	300	300	300	300	300	300	290	270	250	230	220


Ceiling fitting:

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	300	300	300	300	300	300	300	300	300	300	300	300	300	280

To obtain fabric thickness information for a specific Silent Gliss fabric, please refer to the Silent Gliss fabric binder or contact Silent Gliss.

System Options


Side-by-side fixing of two systems

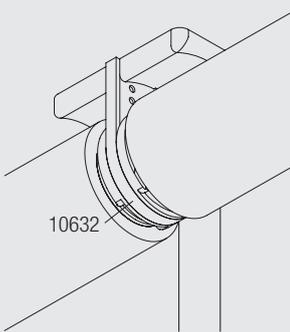


10632 Intermediate cover

Side guides for stabilising blind system and sloped applications (up to 15° incline)

Single system

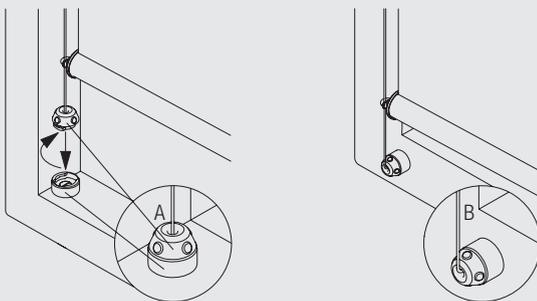

Double system

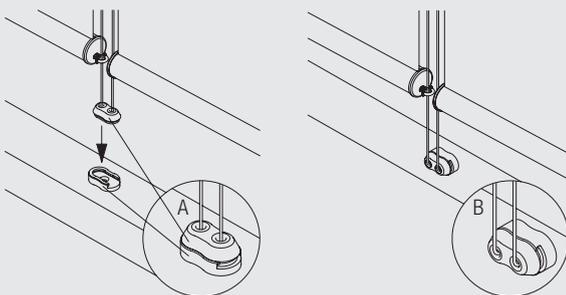


A: Fitting of side guides inside window frame
B: Fitting of side guides onto front of window frame




4910

Adjustable end stop



Optional adjustable end stop allows upper or lower limit setting after installation to avoid bottom bar hitting window ledge.


Child safety device

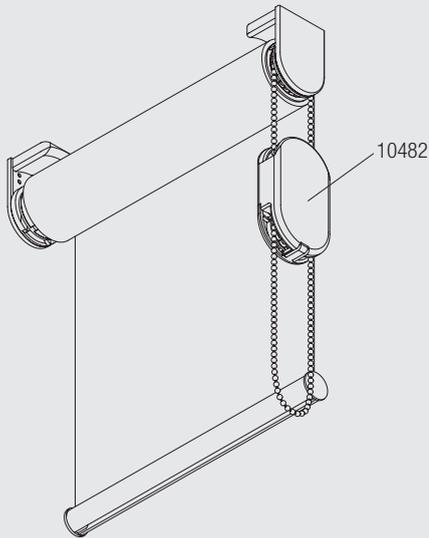

The child safety device SG 10482 releases the chain should the pulling force exceed 6kg.

Please note: System with child safety device has to be installed so chain ends at least 60 cm above floor according to EN 13120.

Chain break connector

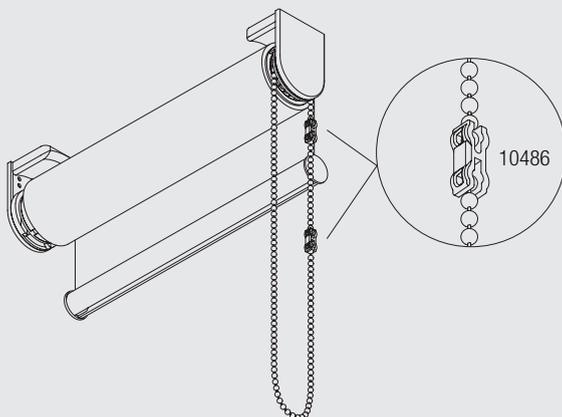

The chain break connector SG 10486 releases the chain should the pulling force exceed 6kg.

Please note: Ref: EN13120 the system with chain break connector has to be installed so chain ends at least 60cm above floor.

If chain is pulled harshly, the chain break connector may release so please consider accessibility before selecting this option!

Stop Controller

The stop controller mechanism halts the blind at any given position - ideal for very tall windows or contracts where all blinds must be at the same level from the outside

Optional box fascia


System 4910 is available with an optional box fascia. Please contact Silent Gliss for further details.

Fitting Information


WARNING

Young children can be strangled by loops in pullcords, chains, tapes and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist to create a loop.


Positioning of system

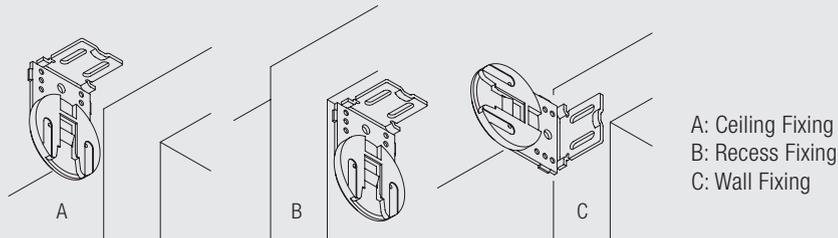

Easy loading and removal of the blind

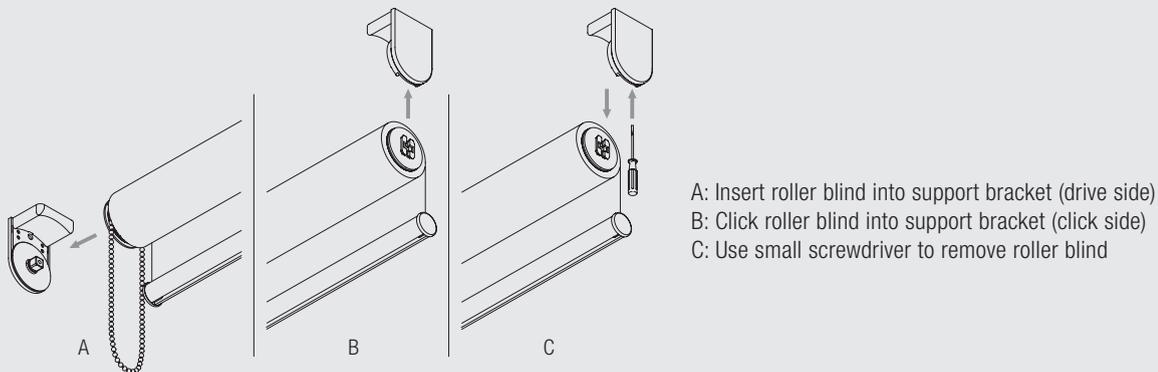

Alternative fixing with continuous installation profile (optional)


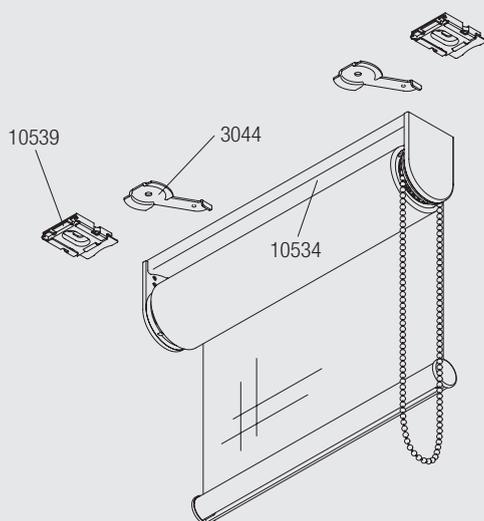


System can be pre-mounted on continuous installation profile 10534 for fast fitting on site. Just mount the system with pre-fixed clamps 3044 or click brackets 10539.




4910

Ceiling fix with brackets

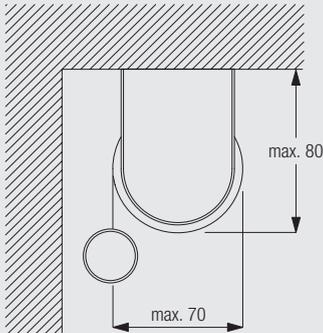

10542
Support bracket drive side



10543
Support bracket click side




10574
Cover




10575
Cover

All measurements are based on the maximum system dimensions.


Ceiling fix with optional installation profile and clamps 3044

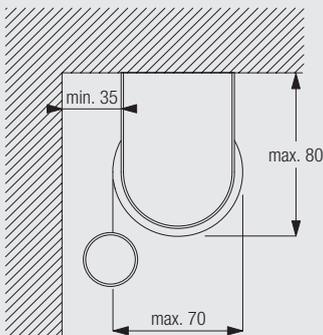


3044
Clamp




10534
Profile



10542
Support bracket drive side



10543
Support bracket click side




10574
Cover




4910

All measurements are based on the maximum system dimensions.


Ceiling fix with optional installation profile and click bracket 10539

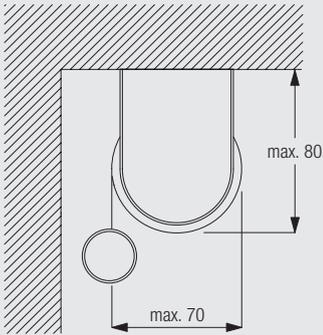


10539
Click bracket




10534
Profile



10542
Support bracket drive
side





10543
Support bracket click
side




10574
Cover

All these measures are based on the maximum system dimensions.

Wall fix with brackets

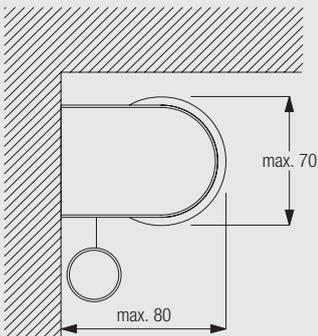

10542
Support bracket drive
side



10543
Support bracket click
side



10574
Cover




10575
Cover




4910

All measurements are based on the maximum system dimensions.


Wall fix with optional installation profile and clamps 3044

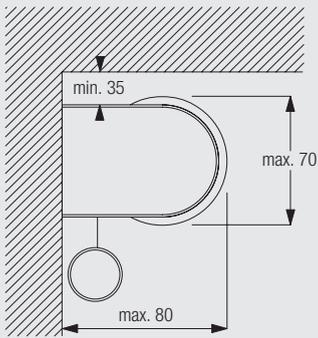


3044
Clamp




10534
Profile



10542
Support bracket drive
side




10543
Support bracket click
side




10574
Cover

All measurements are based on the maximum system dimensions.

Wall fix with optional installation profile and click bracket 10539

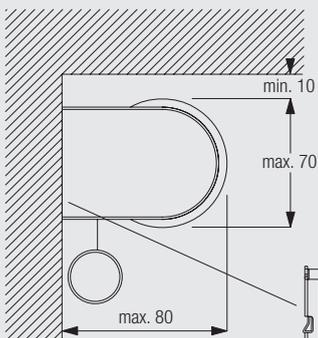


4910



10539




10539
Click bracket




10534
Profile



10542
Support bracket drive
side





10543
Support bracket click
side




10574
Cover

All measurements are based on the maximum system dimensions.

Recess fix with brackets

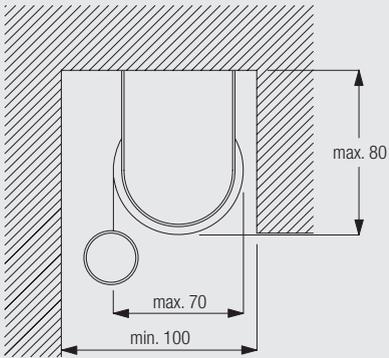

10542
Support bracket drive
side



10543
Support bracket click
side




10574
Cover




10575
Cover

All measurements are based on the maximum system dimensions.


Recess fix with optional installation profile and clamps 3044

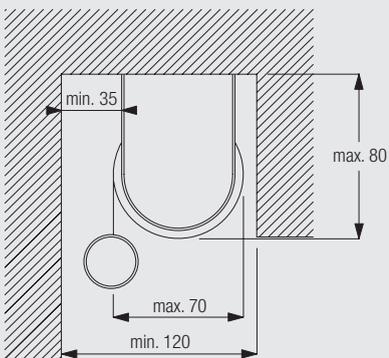


3044
Clamp




10534
Profile



10542
Support bracket drive
side



10543
Support bracket click
side




10574
Cover




4910

All measurements are based on the maximum system dimensions.


Recess fix with optional installation profile and click bracket 10539

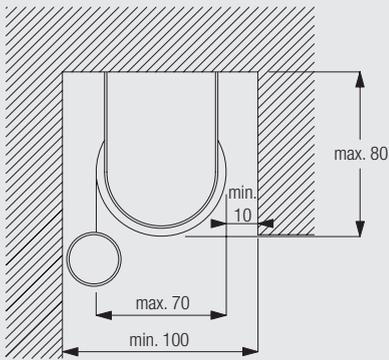


10539
Click bracket



10534
Profile



10542
Support bracket drive
side





10543
Support bracket click
side




10574
Cover

All measurements are based on the maximum system dimensions.


Fitting with optional side guides



4910






8236
Wire base long



8237
Wire holder

Fitting with optional side guides (side-by-side installation)

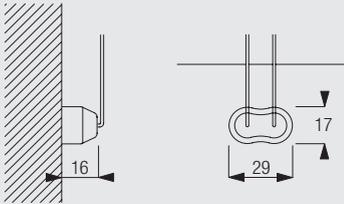


10669
Double base long
(side guide)



10701
Double wire holder
(side guide)


Face Fix with Optional Fascia and clamps 3044

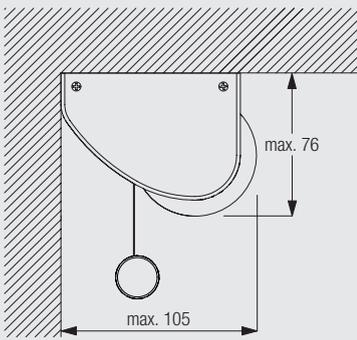

3044
Clamp

Dimensions are based on the maximum system size

Face Fix with Optional Fascia - direct mounting

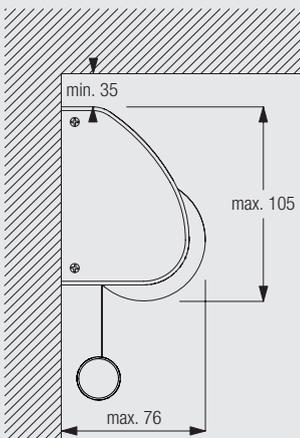

11086
Installation support
plate

Dimensions are based on the maximum system size



4910

Standard Accessories

4221 Bottom bar




10400 Safety Cord Retainer



10530	Stainless steel bead chain (ø 4mm)		10531	Profile	
10542	Support bracket drive side		10543	Support bracket click side	
10574	Cover		10575	Cover	
10639	End cover round				

Optional Accessories

3044	Clamp		3044	Clamp	
8235	Wire base short		8236	Wire base long	
8237	Wire holder		8249	Locking ring	
10387	Cover for metal bracket		10482	Child Safety device - 4mm Metal Bead Chain	
10486	Chain break connector set (incl. chain, chain stop & warning booklet)		10534	Profile	
10535	Design end cover round (metal)		10539	Click bracket	
4910	End stop left		10560	End stop right	
10632	Intermediate cover		10633	Bottom bar rectangle	
10634	Bottom bar oval		10635	End cover rectangle	
10636	End cover rectangle (side guide)		10637	End cover oval	
10638	End cover oval (side guide)		10640	End cover round (side guide)	
10641	Eyelet (side guide)		10642	Wire holder (side guide)	
10643	Wire ø 1.3mm x 4.2m (side guide)		10669	Double base long (side guide)	
10673	Double base short (side guide)		10701	Double wire holder (side guide)	

Supplied by










SG-S | Silent Gliss Spares
Silent Gliss Systems

www.sg-s.co.uk email: sales@sg-s.co.uk tel: 01395 232528

Silent Gliss®

10703	Design bracket click side		10704	Design bracket drive side	
10706	Wire ø 1.3mm x 2.6m (side guide)		10707	Cushion	
10709	Chain stop		11081	Profile	
11083	Cover right		11084	Cover left	
11086	Installation support plate				

Useful Measurements

4221	Bottom bar		10482	Child Safety device - 4mm Metal Bead Chain	
10632	Intermediate cover		10633	Bottom bar rectangle	
10634	Bottom bar oval		10635	End cover rectangle	
10637	End cover oval		10639	End cover round	
10703	Design bracket click side		10704	Design bracket drive side	



Supplied by



www.sg-s.co.uk email: sales@sg-s.co.uk tel: 01395 232528

www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com