



To reverse direction on command Swap SL1 & SL2 at plug

Transmitters

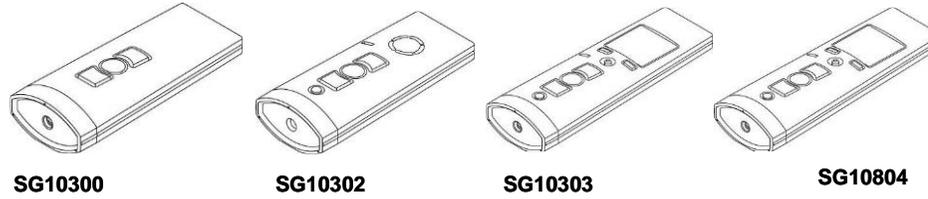


Switches

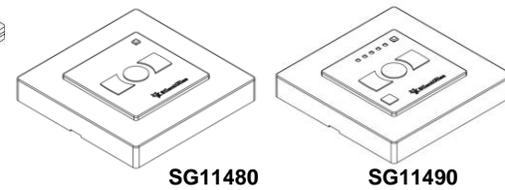

Refer to separate instructions for set-up and commissioning of radio controls

System Motor Ratings (230v)

SG2195	0.6 amp
SG2350	0.80 amp
SG4760	0.80 amp
SG4770	0.80 amp
SG4780	0.80 amp
SG4960	0.80 amp
SG4970	0.80 amp
SG4880	0.90 amp
SG5800	2.20 amp
SG8600	0.66 amp
SG8640	1.00 amp

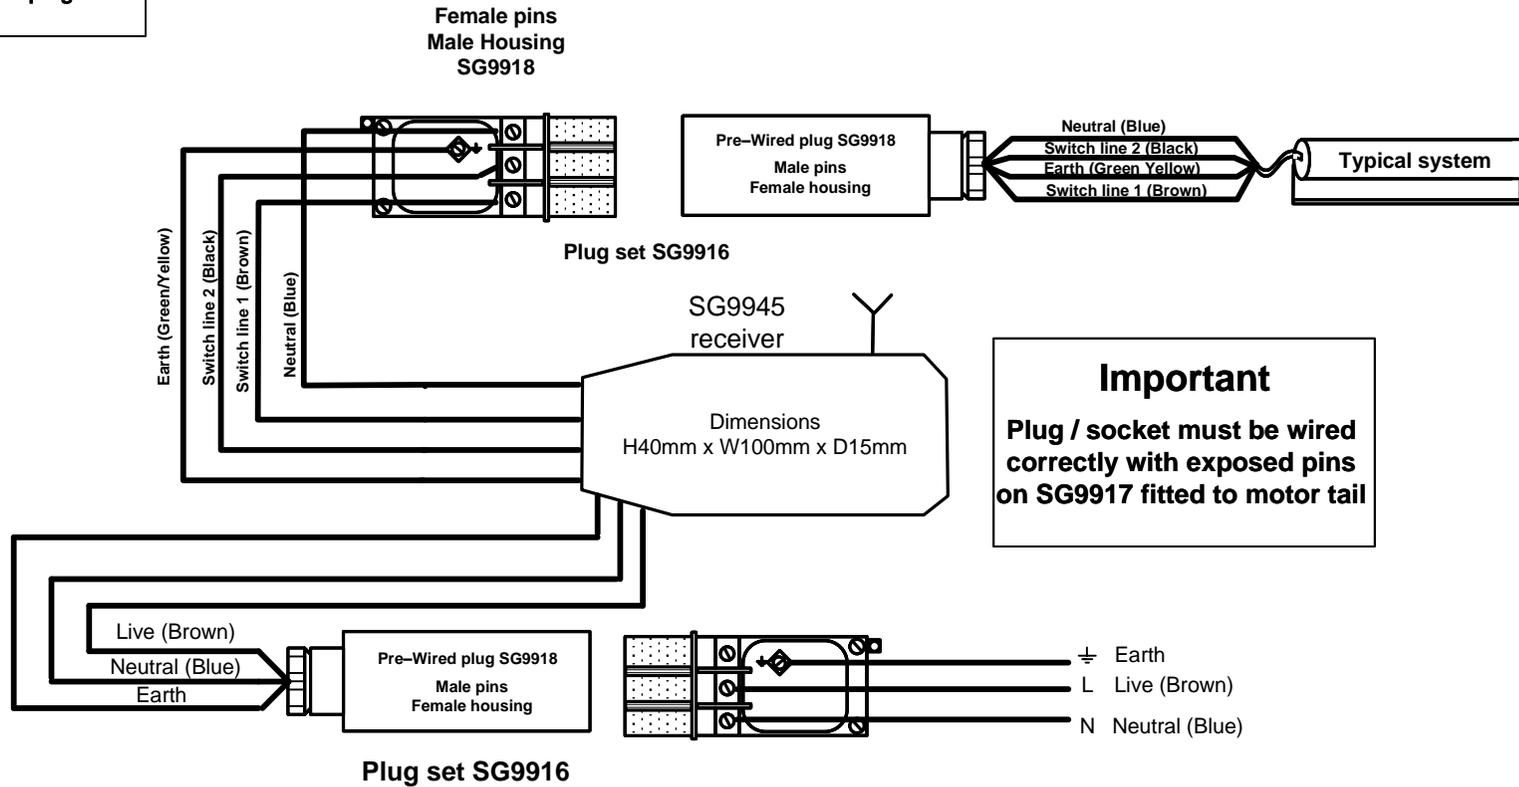

Important
 Plug / socket must be wired correctly with exposed pins on SG9917 fitted to motor tail

Silent Gliss Ltd
 Poorhole Lane.
 Broadstairs
 Kent CT10 2PT
 Tel 01843 863571
 Fax 01843 864503
 E-mail: info@silentgliss.co.uk
 Web site: www.silentgliss.co.uk

Silent Gliss Radio Control System Series 20 SG9940 – SG9945 Receiver
Systems SG2195, SG2350, SG4760/70/80, SG4960, SG4970, SG4880, SG5800,
1 motor per receiver

Drawing Number
E 602
Issue Date 18/11/22
FRO