



Transmitters



Switches

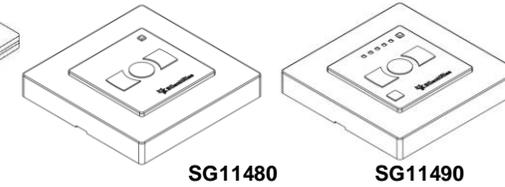

Refer to separate instructions for set-up and commissioning of radio controls

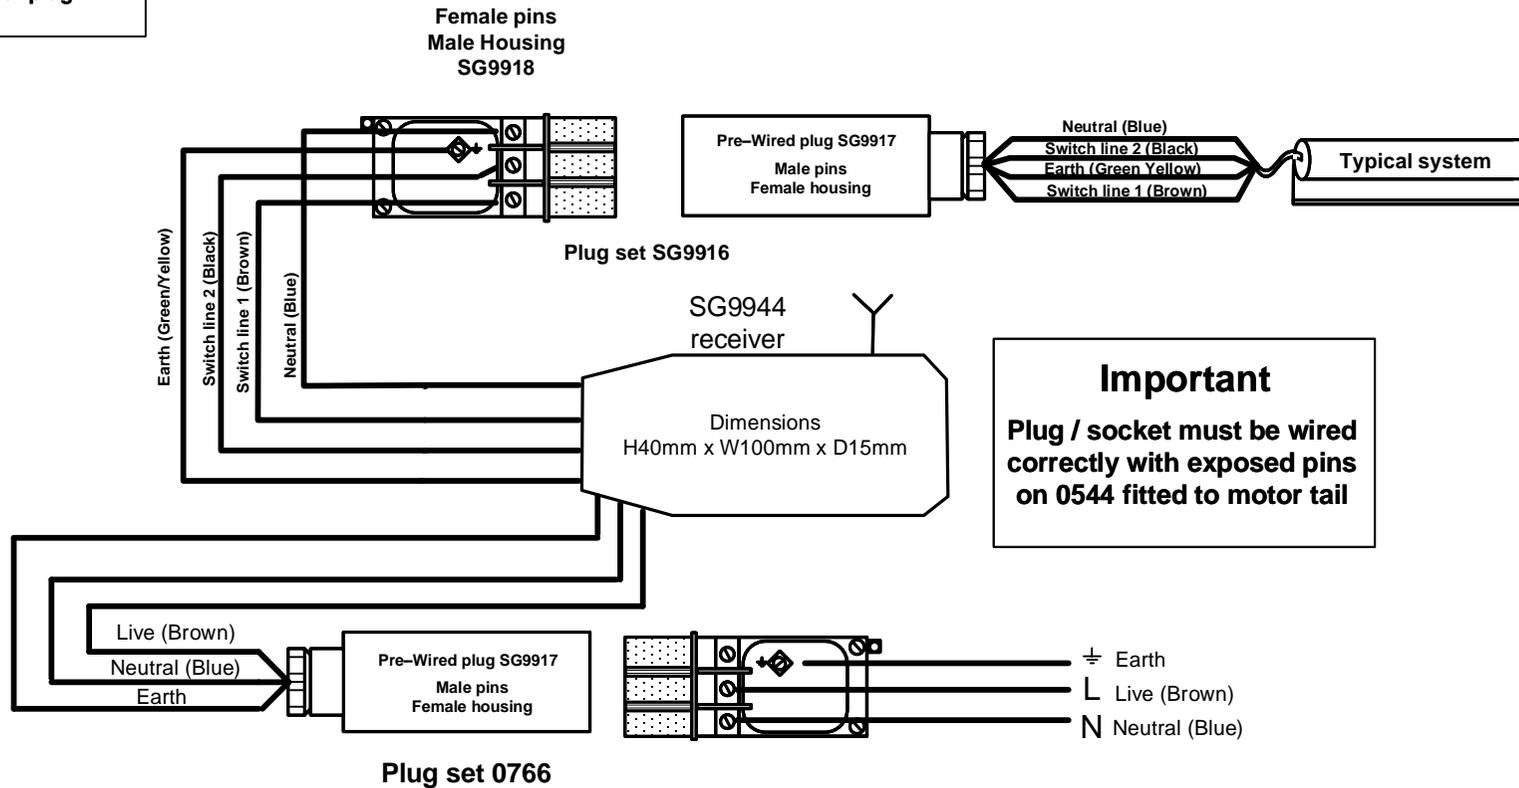

Important
 Plug / socket must be wired correctly with exposed pins on 0544 fitted to motor tail

System Motor Ratings (230v)
 SG8960 – 0.57 amp

Remarks
 Always connect protective earth
 Always read safety instruction in user manual first

Silent Gliss Ltd
 Poorhole Lane.
 Broadstairs
 Kent CT10 2PT
 Tel 01843 863571
 Fax 01843 864503
 E-mail: info@silentgliss.co.uk
 Web site: www.silentgliss.co.uk

Silent Gliss Radio Control System SG9940 – SG9944 Receiver
 Systems (SG8960 retro fit)
 1 motor per receiver

Drawing Number
E 603
 Issue Date 02/02/21
 FRO