




Motor (with tail)

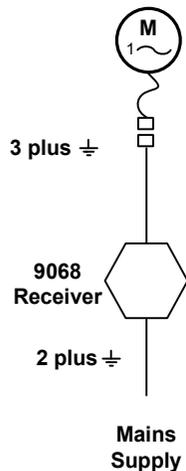


All printed & electronically distributed copies of this drawing are uncontrolled copies


**Important**

Plug / socket must be wired correctly with exposed pins on 0544 fitted to motor tail


Detachable Motor Tail 0562

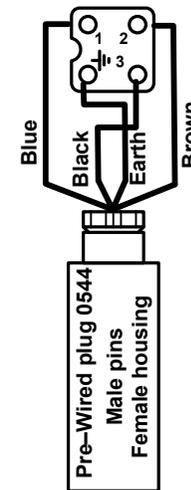


Motor with tail & plug 0544/0543



Female pins Male Housing 0546



Receiver 9068

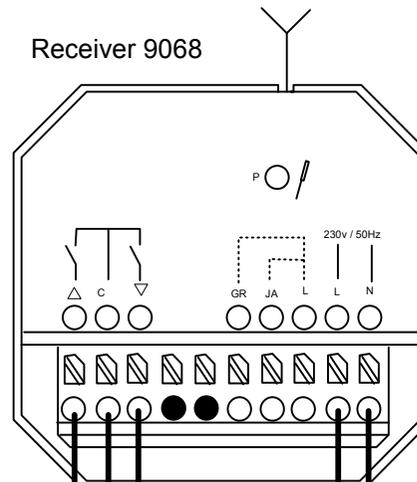

Supplied by

**SG-S** | Silent Gliss Spares  
Silent Gliss Systems

www.sg-s.co.uk email: sales@sg-s.co.uk  
Tel: 0330 1272002 - 01395 232528

System Motor Rating 230V 5300 – 0.82 amp

Blue ( Neutral )

Black ( Signal )

Brown ( Live )

Earth


N (Blue)

L (Brown)


$\perp$  (Earth)

Transmitters


Switches




10300




10302




10303



9943



9946



9948

Remarks

Always connect protective earth

Always read safety instruction in user manual first

5360  
DIP Switch  
Setting

1	2	3	4
off	on	off	off

Refer to separate instructions for set-up and commissioning of radio controls

Silent Gliss Ltd  
Poorhole Lane.  
Broadstairs  
Kent CT10 2PT  
Tel 01843 863571  
Fax 01843 864503  
E-mail: info@silentgliss.co.uk  
Web site: www.silentgliss.co.uk

**Silent Gliss Radio Control System 9940 – 9068 Receiver Systems 5300**

**1 or 2 Motors only - Simultaneously**

3 < 15 Motors see drg E203

Motor Type A A  
Drawing Number

**E 606**

Issue Date 18-10-12