


**System Motor Ratings ( 230v)**


- 2350 - 0.80 Amp
- 4760 - 0.80 amp
- 4770 - 0.80 Amp
- 4780 - 0.80 Amp
- 4960 - 0.80 Amp
- 4870 - 0.80 Amp
- 4880 - 0.90 Amp
- 8960 - 0.50 Amp

**Silent Gliss Ltd**  
 Poorhole Lane.  
 Broadstairs  
 Kent CT10 2PT  
 Tel 01843 863571  
 Fax 01843 864503  
 E-mail: info@silentgliss.co.uk  
 Web site: www.silentgliss.co.uk

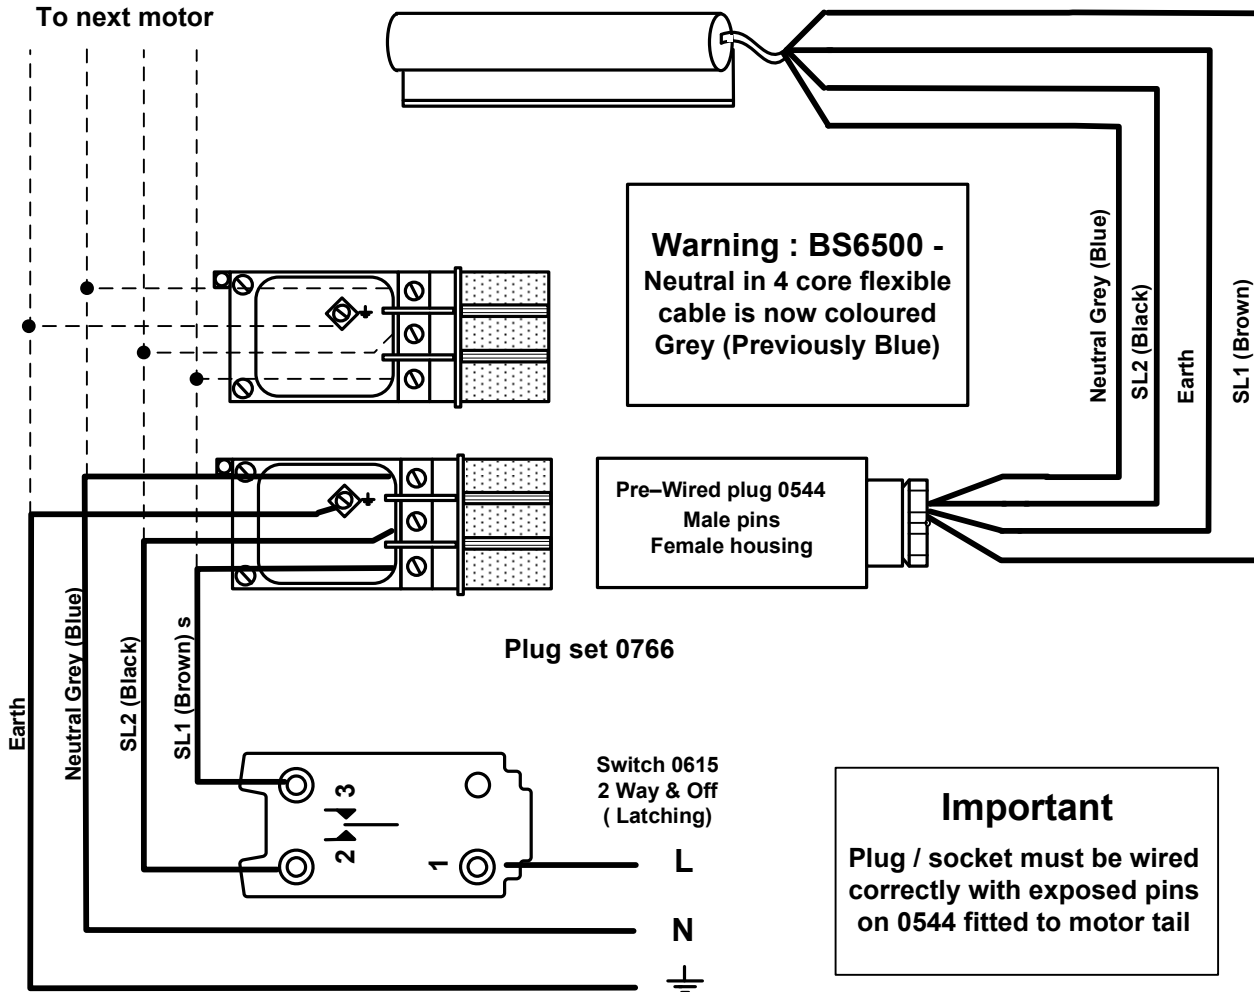

**Important**  
 Plug / socket must be wired correctly with exposed pins on 0544 fitted to motor tail

Supplied by  
**SG-S** | Silent Gliss Spares  
 Silent Gliss Systems  
 www.sg-s.co.uk email: sales@sg-s.co.uk  
 Tel: 0330 1272002 - 01395 232528

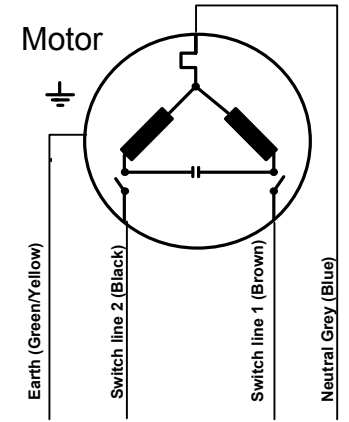

To reverse direction on command  
 Swap SL1 & SL2 at plug

Up to 10 motors simultaneously  
 All tubular motors cumulative total load must be 25% below the switch / fuse rating  
 Max 3 motors in parallel for 8960 only

**Remarks**  
 Always connect protective earth  
 Always read safety instruction in user manual first

**Single switched motors or 2 or more motors switched simultaneously from a single switch**  
**Systems 2350, 4760/70/80, 4960, 4870, 4880, 8960**

**Drawing Number**

**E 103**

**Issue Date 04-1-18**