


Motor		
Operating temperature range	0°C ... +60°C -20°C ... +70°C	Unrestricted operation of rated data Storage
Protection class	IP40	Operation in dry rooms
Nominal voltage	100 ... 250 VAC / 50 ... 60 Hz	
Max. Current	0.5 A @ 240V, 1.3 Amp @ 110V	
Max. speed	160 min <sup>-1</sup>	
Max. track length	25 m	
Max. torque	2.4 Nm	

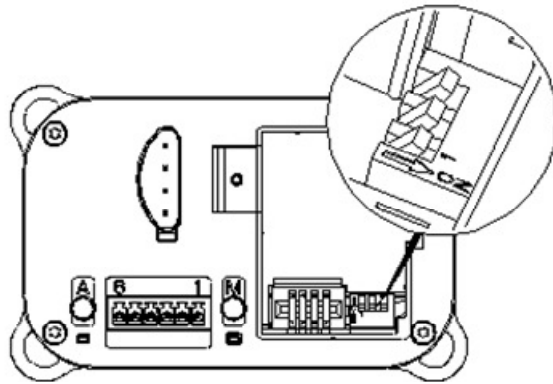

DIP-Switch-Position	Operation mode
1 - X - X	latching
0 - X - X	non latching
X - 1 - X	Touch & Go and Manual Override on
X - 0 - X	Touch & Go and Manual Override off
X - X - 1	Revolution 160min <sup>-1</sup>
X - X - 0	Revolution 120min <sup>-1</sup>
1 - 1 - 1	Standard (default) setting

**Key**

1 = On  
 0 = Off

\*Sample 1    1    1  

 Revolution 160 / min  
 Touch & Go, Manual Override On  
 Latching