


Motor Setting

Dip Switch settings
 1 2 3
 On On On

Detachable Motor Tail

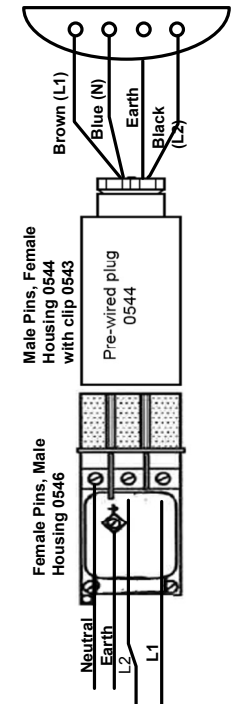

Supply
 90-250v AC

Motor Tail 2.0 m long
 inc. plugs

Always read safety instruction in installation & user manual before use.

Motor Rating

0.45A @ 240v 50Hz
 1.30A @ 110v 60Hz

Silent Gliss Ltd
 Poorhole Lane.
 Broadstairs
 Kent CT10 2PT
 Tel 01843 863571
 E-mail: info@silentgliss.co.uk
 Web site: www.silentgliss.co.uk

Silent Gliss Curtain Tracks – Radio Control Via 9940 or 0450, System 5600

Supplied by
SG-S | Silent Gliss Spares
 Silent Gliss Systems
 www.sg-s.co.uk email: sales@sg-s.co.uk
 Tel: 0330 1272002 - 01395 232528

Drawing Number

E303

Issue Date 21-01-16