


Hand Operated Curtain Pole System

Silent Gliss® 6100M Metroflat 36mm

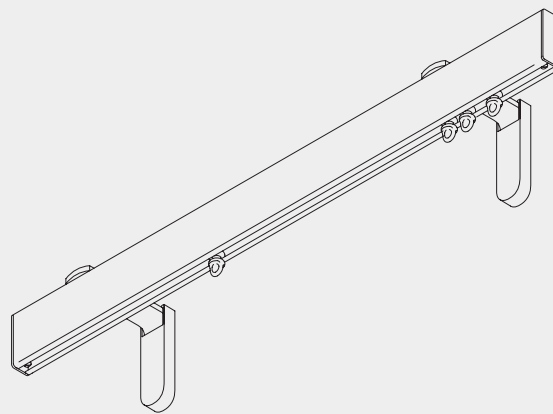


Product Information

- Hand operated system for domestic and contract applications
- Attractive contemporary appearance for modern interiors
- Can be bent to a small radius for bay windows
- Available in 8 finishes - white, chrome effect, silver, black, steel grey, bronze, antique bronze and gunmetal
- Accessorised with endcaps or a range of finials
- Easy fitting to wall or ceiling
- For light to medium weight curtains
- Profile length 6m (chrome effect 4m)
- Suitable for Wave Standard and Wave XL curtain heading systems



6100M

Profile, Bending and Specification Information



6101




Standard radius 200mm
Min. radius Wave XL: 500mm

Note: It is important to observe the above minimum bending radius for Wave XL. The system will not function with a smaller radius.

Specification Information - download from www.silentgliss.co.uk

Silent Gliss 6100M curtain track, hand drawn, aluminium, assembled complete with gliders 6143 at 10/m and 2 endcovers 0351. Face fix with bracket 3134/2-36/2/ 0989/ 0537/ 0334. Top fix with bracket 6138P/ 0335 at 700mm centres. Finished in white, black, silver, gunmetal, bronze, antique bronze, steel grey or chrome effect.



How To Measure



A: System Width - includes finials. See 'Design Options' for finial sizes.

Stack Size Calculation Wave Standard

6100M



a = Stack depth
b = Stack size
c = Min. distance

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
6	10	2.1	10	23 per metre of track + endpiece	8
6	12	2.3	12	23 per metre of track + endpiece	9
8	14	2.1	14	18 per metre of track + endpiece	10
8	16	2.3	16	18 per metre of track + endpiece	11


Wave standard with roller gliders

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
8	14	2.1	14	21 per metre of track + endpiece	10
8	16	2.3	16	21 per metre of track + endpiece	11

(dimensions in cm)

Note: Minimum distance (c) includes a standard 3cm clearance (front and back).

Stack size calculation Wave XL




a = Stack depth 35cm
b = Stack size
c = Min. distance 22cm

System width		77-107	108-143	144-179	180-215	216-251	252-287	288-323	324-359	360-395
	b	21	26	31	36	41	46	51	56	61
System width		396-431	432-468	469-503	504-539	540-575	576-600			
	b	66	71	76	81	86	91			
System width		154-217	218-289	290-361	362-433	434-505	506-577	578-600		
	b	21	26	31	36	41	46	51		

(dimensions in cm)


Design Options

Endcaps

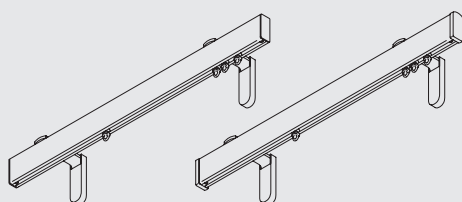

Without finials, poles are supplied as standard with flush fitting endcaps 0351 (left). Alternatively, stud endcaps 0710 (right) can be selected at no additional cost.

Finials

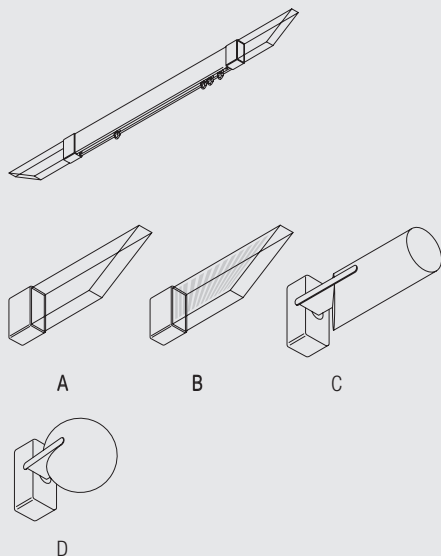

Finials are decorative elements that fix to the end of the pole.


- A: 0991CL Shard (clear) 116mm
- B: 0991ET Shard (etched) 116mm
- C: Fused Barrel (walnut/oak/colour matched) 102mm
- D: Fused Ball (walnut/oak/colour matched) 63mm

Please consult the Metropole Brochure for full range details.




6100M

Wave Standard curtain heading system



The Wave curtain heading system is an exciting contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m or 10kg/m with wave roller glider 6098W.

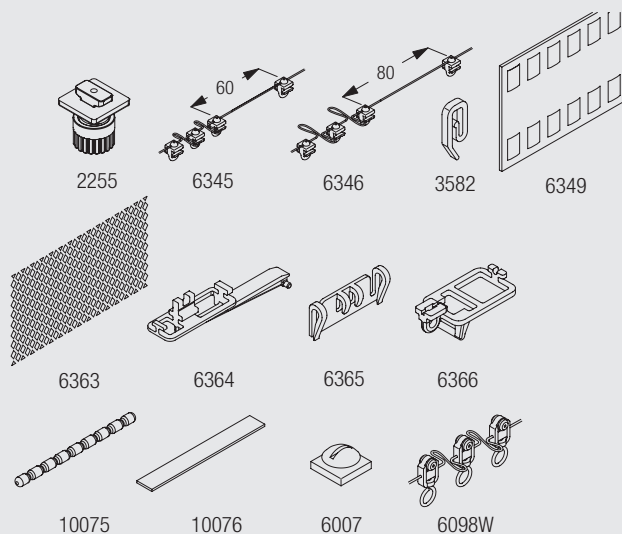

The Wave standard components are:

6345 Glider Cord 60mm
6346 Glider Cord 80mm
6007 End stop

The items listed below for Enhanced Wave (80mm glider cord only) are all supplied at an additional cost as per the price list.


2255 Adjustable brake
6364 Extension (for use with 6365)
6365 Hanger (for use with 6364)
6366 Carrier for draw rod

Roller gliders must be ordered separately
6098W Wave roller glider 80mm


Optional enhanced components to improve the presentation of the curtain>:

3582 Hook
6349 Curtain tape
6363 Iron-on top hemming tape
10075 Lead weight for bottom hem 50gr/m
10076 Fabric weight for side of curtain

Wave XL curtain heading system



6100M

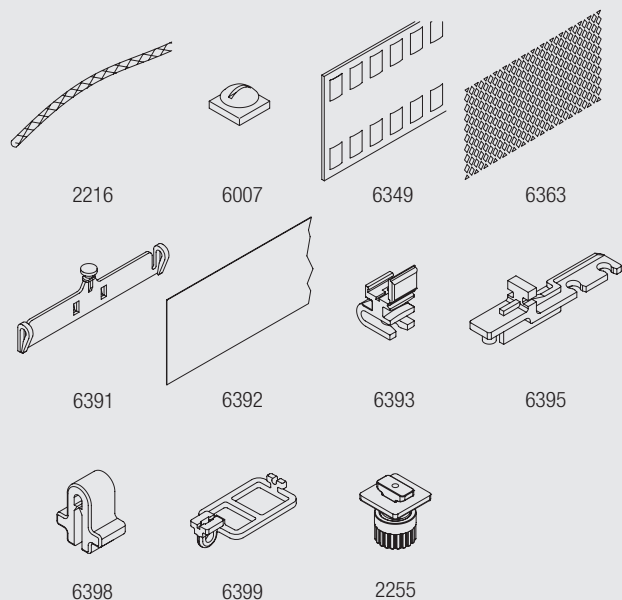

The Wave XL components are:


216 Cord 0.85 mm
2255 Adjustable brake
6007 End stop
6349 Curtain tape
6363 Iron tape

Fitting Information

Bracket positioning when using brackets 3134/2-3136/2




Fitting of track to brackets

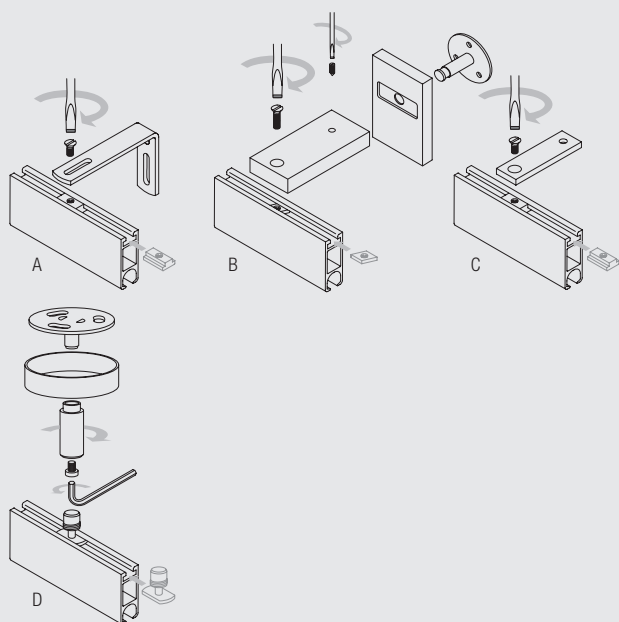

- A: Using brackets 3134/2 - 3136/2
- B: Using Blok brackets 0989
- C: Using top fix plate 6138P
- D: Using top fix bracket 0335

Fitting bent tracks.

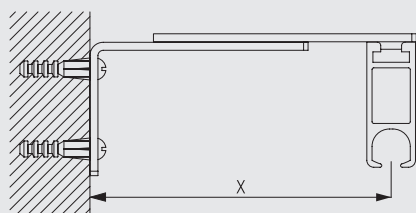


Note: all bent Metropole systems are supplied with adjustable bracket 0537 as standard.




6100M

Fitting Options


Wall fix with brackets 3134/2-3136/2



	X (mm)
3134/2	52
3135/2	72
3136/2	92



3134/2-3136/2
Extension brackets





6141
Track insert (uses
screw 0798)

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Min. distance from wall when using Wave XL: 220mm.

Wall fix with Blok brackets 0989

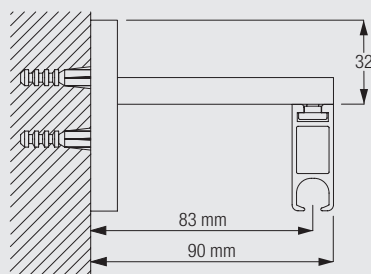

0989
Blok Bracket


The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Min. distance from wall when using Wave XL: 220mm.


Ceiling fix with support 6138P



6100M



X (mm)
80




6138p
Ceiling support set
(3mm)


The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.

Min. distance from wall when using Wave XL: 220mm.


Wall fix with adjustable bracket 0537

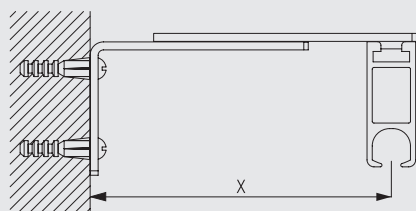

	X (mm)
0537	80-100



0537
Adjustable bracket




6141
Track insert (uses
screw 0798)

The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions.



Min. distance from wall when using Wave XL: 220mm.

All bent Metroflat 36mm systems are supplied with adjustable brackets 0537 as standard.

Ceiling Fix with Top Fix Bracket 0335



	X	Y
0334	80	115



X (mm)

Standard Accessories

Parts

0351	Metroflat end cap		0537	Adjustable bracket	
3133	Bracket cover (60mm)		3134	Extension bracket (60mm)	
6065	Twist eye endstop		6101	Profile	
6141	Track insert (uses screw 0798)		6143	Glider 6144 in strip form	
6784	Machine screw (for 6141 insert)				

6100M




Optional Accessories

Parts

0304	Fused barrel (36mm)		0318	Fused ball (36mm)	
0335	Top fix bracket		0710	Stud Endcap	
0989	Blok Bracket		2216	Cord	
6117	Track insert		6283	Roller glider	

6398	Clip		3135/2	Pole extension bracket (80mm - all colours)	
3136/2	Pole extension bracket (100mm - all colours)		6138p	Ceiling support set (3mm)	
0991CL	Shard Clear Metroflat		0991ET	Shard Etched Metroflat	

Wave Accessories

2216	Cord		2255	Adjustable brake	
3582	Hook		6007	Endstop	
6345	Wave glider cord (60mm)		6346	Wave glider cord (80mm)	
6349	Wave curtain heading tape		6363	Top hemming tape	
6364	Extension		6365	Hanger	
6366	Wave carrier for draw rod		6391	Hanger	
6392	Heading film		6393	Glider	
6395	Extension		6398	Clip	
6399	Carrier for Draw rod		10075	Lead weight 50 gr/m	
10076	Fabric weight		6098W	Wave roller glider cord (80mm)	



6100M



www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com